



Attorney Docket No.: 6770P004

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In Re Patent Application of:)

Nicholas Paul Cowley, et al.)

Application No.: 10/688,556)

Filed: October 16, 2003)

For: RADIO FREQUENCY TUNER)

Examiner:

Art Unit: 2681

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

I hereby certify that this correspondence is being deposited with the United States Postal Service as first class mail with sufficient postage in an envelope addressed to the Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

on March 11, 2004
Date of Deposit

Christopher P. Marshall
Name of Person Mailing Correspondence
CP Marshall 3/11/2004
Signature Date

SUBMISSION OF CERTIFIED COPY OF PRIORITY DOCUMENT

Sir:

Applicants hereby enclose a certified copy of the priority document for the above-referenced patent application. The enclosed document is a certified copy of British Application No. GB 0224337.6, filed October 19, 2002.

If there are any charges not covered by any check submitted, please charge Deposit Account No. 02-2666.

Respectfully submitted,

BLAKELY, SOKOLOFF, TAYLOR & ZAFMAN LLP

Dated: March 11, 2004

Lester J. Vincent
Lester J. Vincent
Registration No. 31,460

12400 Wilshire Boulevard
Seventh Floor
Los Angeles, CA 90025
(408) 720-8300

100

10/1/1941



US copy



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.




Signed

W. Evans

Dated 18 November 2003



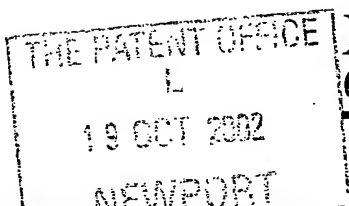




**Statement of inventorship and of
right to grant of a patent**

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference	JSR.P52119GB					
2. Patent application number <i>(if you know it)</i>	19 OCT 2002	0224337.6				
3. Full name of the or of each applicant	Zarlink Semiconductor Limited					
4. Title of the invention	"Radio Frequency Tuner"					
5. State how the applicant(s) derived the right from the inventor(s) to be granted a patent	By virtue of the inventors' employment by the applicant company					
6. How many, if any, additional Patents Forms 7/77 are attached to this form? <i>(see note (c))</i>						
7.	<p>I/We believe that the person(s) named over the page <i>(and on any extra copies of this form)</i> is/are the inventor(s) of the invention which the above patent application relates to.</p> <table border="0" style="width: 100%;"> <tr> <td style="width: 60%;">Signature Marks & Clerk</td> <td style="width: 40%;">Date</td> </tr> <tr> <td></td> <td>18 October 2002</td> </tr> </table>		Signature Marks & Clerk	Date		18 October 2002
Signature Marks & Clerk	Date					
	18 October 2002					
8. Name and daytime telephone number of person to contact in the United Kingdom	John S. Robinson (01865) 397900					

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there are more than three inventors, please write the names and addresses of the other inventors on the back of another Patents Form 7/77 and attach it to this form.
- d) When an application does not declare any priority, or declares priority from an earlier UK application, you must provide enough copies of this form so that the Patent Office can send one to each inventor who is not an applicant.
- e) Once you have filled in the form you must remember to sign and date it.

Patents Form 7/77

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

COWLEY, Nicholas Paul
3 Priors Hill
Wroughton
Wiltshire
SN4 0RT

Patents ADP number (if you know it):

01017722004

CROSSLEY, Richard
35 Thurlestone Road
Swindon
SN3 1EQ

Patents ADP number (if you know it):

05488074001

Reminder

Have you signed the form?

Patents ADP number (if you know it):

Patents Form 1/77


Patents Act 1977
(Rule 16)

The
**Patent
Office**

210CT02 E757107-3 D01063
P01/7700 0.00-0224337.6

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

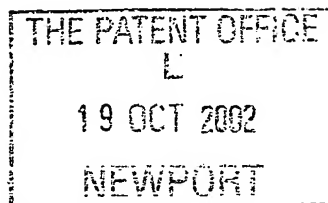

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference	JSR.P52119GB		
2. Patent application number (The Patent Office will fill in this part)	19 OCT 2002	0224337.6	
3. Full name, address and postcode of the or of each applicant (underline all surnames) 0824296800 1 Patents ADP number (if you know it) If the applicant is a corporate body, give the country/state of its incorporation	Zarlink Semiconductor Limited Cheney Manor Swindon Wiltshire SN2 2QW United Kingdom		
4. Title of the invention	"Radio Frequency Tuner"		
5. Name of your agent (if you have one) "Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode) Patents ADP number (if you know it)	Marks & Clerk 4220 Nash Court Oxford Business Park South Oxford OX4 2RU United Kingdom 7271125001		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	Yes		

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description	5
Claim(s)	2
Abstract	1
Drawing(s)	2

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)	1
--	---

Request for preliminary examination and search (Patents Form 9/77)	1
--	---


Request for substantive examination
(Patents Form 10/77)

Any other documents
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date

Marks & Clerk

18 October 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

John S. Robinson
(01865) 397900

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

RADIO FREQUENCY TUNER

The present invention relates to a radio frequency tuner for analogically and digitally modulated signals. Such a tuner may be used to receive terrestrial broadcast signals and may also be used for receiving signals from cable and satellite systems.

Many digital services are transmitted in parallel with analog services and this situation is likely to continue for some time. In many cases, the digital services do not necessarily offer duplicate data streams to the corresponding analog services. An example of such an arrangement is where national services may be replicated in those digital and analog services but local programming may only be broadcast on the analog services. It is therefore a common requirement in receivers that means for both digital and analog reception have to be provided.

Figure 1 of the accompanying drawings illustrates an example of a known type of "dual standard" tuner for receiving terrestrial digital and analog services. An antenna input 1 is connected to a power splitter 2, which is required to buffer the input spectrum to an analog path 3 and a digital path 8 while adding minimum degradation to the signal quality. The analog path 3 comprises an analog tuner 4, which receives and down converts any selected channel to an output intermediate frequency (IF). The output of the analog tuner 4 is connected to a surface acoustic wave filter (SAWF) 5, whose function is to filter out the desired channel and possibly isolate the video and audio information contained within the analog channel. The output of the filter 5 is connected to an analog demodulator 6 for demodulating the selected channel. The output of the demodulator 6 is connected to an output device illustrated as a common display means 7, such as a monitor.

The digital path 8 comprises a digital tuner 9, which down converts the desired channel to another intermediate frequency, which may be the same as or different from the intermediate frequency in the analog path 3. The output of the tuner 9 is connected to a surface acoustic wave filter 10, which filters out the desired channel and provides attenuation to adjacent interfering channels. The output of the filter 10 is supplied to an

IF amplifier 11, which compensates for the insertion loss of the filter 10. The output of the amplifier 11 is supplied to a further surface acoustic wave filter 12, which provides further attenuation to the adjacent interfering channels. The output of the filter 12 is connected to a digital demodulator whose output is connected to the common display means 7. The demodulator 13 demodulates the received channel and contains an analog-digital converter (ADC). The demodulator may provide further gain.

In the arrangement shown in Figure 1, two different tuners 4 and 9 are necessary because of differences in the performance requirements for digital and analog channels. For example, the digital tuner 9 generally requires a higher signal handling capability in order to cope with relatively high amplitude adjacent interfering analog signals. Also, the digital tuner 9 is generally required to have a superior local oscillator noise performance in order to meet the requirements of digital demodulation. Further, the digital tuner 9 may be required to cover only a portion of the band covered by the analog tuner 4.

The presence of the power splitter 2 inevitably degrades the signal quality to a greater or lesser extent. For example, the power splitter 2 is required to handle a relatively large input signal energy and intermodulation products generated within the splitter 2 degrade the received signals. Also, the power splitter 2 contributes its own thermal noise to the received spectrum and so degrades the noise performance of the tuner. Further, two independent tuners are required together with various surface acoustic wave filters and this adds to the size and cost of such an arrangement.

According to the invention, there is provided a radio frequency tuner for analogically and digitally modulated signals, comprising a tuner arrangement for converting any selected analog or digital channel to baseband or zero intermediate frequency, an analog-digital converter for converting the selected baseband channel to a digital signal, and a digital signal processor for performing channel filtering.

The tuner may comprise a remodulator for converting an analog channel processed by the processor to an analogically modulated signal at a predetermined intermediate frequency. The intermediate frequency may be a non-zero intermediate frequency. The remodulator may comprise a digital remodulator and a digital-analog converter.

The tuner arrangement may be arranged to convert the selected channel to quadrature signals. The processor may be arranged to correct quadrature conversion errors.

The tuner may comprise an analog anti-alias filter between the tuner arrangement and the analog-digital converter. The anti-alias filter may be a low pass filter. The processor may have selectable filtering characteristics for different modulation standards.

The tuner may comprise a digital demodulator connected to the first output.

The tuner may comprise an analog demodulator connected to the second output.

The tuner may comprise a single monolithic integrated circuit.

It is thus possible to provide a tuner for analog and digital signals requiring only a single tuner arrangement. Also, it is not necessary to use surface acoustic wave filters. In particular, such filters can be replaced by simple low pass filters in the analog domain and most channel filtering can be performed in the digital domain. The absence of surface acoustic wave filters eliminates the requirement for compensating gain stages. The system power, cost and size such as circuit board area may therefore all be substantially reduced. Further, it is unnecessary to provide a power splitting function at the input so that the degrading affects on signal-to-noise and system-to-modulation performance can be avoided.

The invention will be further described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a block circuit diagram of a known type of multi-mode tuner for terrestrial signals; and

Figure 2 is a block circuit diagram of a tuner constituting an embodiment of the invention.

Like reference numerals refer to like parts throughout the drawings.

The tuner shown in Figure 2 comprises an antenna input 1 connected to a digital path 8 but not connected to an analog path 3 so that no power splitting is required at the input of the tuner. The digital path 8 comprises a common tuner 20, which performs quadrature down conversion of any selected analog or digital channel to zero intermediate frequency or baseband. The I and Q outputs of the common tuner 20 are connected to a quadrature low pass anti-alias filter 21, which filters out the desired channel and provides initial attenuation of adjacent interfering channels and channels at aliasing frequencies. The outputs of the filter 21 are connected to a dual analog-digital converter (ADC) 22, which digitises the baseband quadrature signals.

The digital signals from the converter 22 are supplied to a digital signal processor 23. The processor 23 corrects for quadrature conversion errors introduced, for example, by the common tuner 20. The processor 23 also corrects for imbalances in the filter 21 and may provide appropriate feedback signals to the filter 21. The processor 23 also performs channel filtering in the digital domain. The channel filtering may have different selectable characteristics so as to adapt the filtering to the needs of the modulation standard of the channel being received.

The output of the processor 23 is connected to a digital demodulator 13, whose output is connected to a common display means 7. The output of the processor 23 is also connected to a digital remodulator and digital-analog converter (DAC) 24. The

remodulator receives the filtered channel information from the processor 23 and performs digital quadrature modulation to an intermediate frequency compatible with analog demodulation. The remodulated signal is converted to an analog signal and may be subjected to some simple "loose" output filtering to remove digital artefacts. The remodulated analog signal is supplied to an analog demodulator 6, whose output is supplied to the common display means 7. Thus, the analog path 3 comprises only the analog demodulator 6.

As an alternative, the remodulator and DAC 24 and the analog demodulator 6 may be replaced by a demodulator which operates in the digital domain to recover the analog signal and which is connected directly to an output of the processor 23.

It is thus possible to provide a system which substantially simplifies the requirements for mixed modulation receivers. A dual tuner arrangement is replaced with a single tuner and all surface acoustic wave filters can be eliminated from the system. The filtering is replaced by simple low pass filters in the analog domain and these may be integrated onto a monolithic integrated circuit containing the tuner so as to reduce system size and cost. Channel filtering is largely performed in the digital domain and does not require extra resources as such filtering is generally already present in conventional arrangements, for example within digital demodulators.

The elimination of surface acoustic wave filters removes the requirement for compensating gain stages so that power consumption can be reduced and less circuit board area is required, thus leading to reduced costs. The use of a common tuner for all types of signals removes the requirement for power splitting at the input of the tuner so that the degrading effects of such power splitting on noise and intermodulation performance can be avoided.

CLAIMS:

1. A radio frequency tuner for analogically and digitally modulated signals, comprising a tuner arrangement for converting any selected analog or digital channel to baseband or zero intermediate frequency, an analog-digital converter for converting the selected baseband channel to a digital signal, and a digital signal processor for performing channel filtering.
2. A tuner as claimed in claim 1, comprising a remodulator for converting an analog channel processed by the processor to an analogically modulated signal at a predetermined intermediate frequency.
3. A tuner as claimed in claim 2, in which the intermediate frequency is a non-zero intermediate frequency.
4. A tuner as claimed in claims 2 or 3, in which the remodulator comprises a digital remodulator and a digital-analog converter.
5. A tuner as claimed in any one of the preceding claims, in which the tuner arrangement is arranged to convert any selected channel to quadrature signals.
6. A tuner as claimed in claim 5, in which the processor is arranged to correct quadrature conversion errors.
7. A tuner as claimed in any one of the preceding claims, comprising an analog anti-alias filter between the tuner arrangement and the analog-digital converter.
8. A tuner as claimed in claim 7, in which the anti-alias filter is a low pass filter.
9. A tuner as claimed in any one of the preceding claims, in which the processor has selectable filtering characteristics for different modulation standards.

10. A tuner as claimed in any one of the preceding claims, comprising a digital demodulator connected to the processor.
11. A tuner as claimed in any one of the preceding claims, comprising an analog demodulator.
12. A tuner as claimed in any one of the preceding claims, comprising a single monolithic integrated circuit.

ABSTRACT
RADIO FREQUENCY TUNER

(Figure 2)

A tuner for analogically and digitally modulated signals comprises a single tuner arrangement (20) for converting any selected analog or digital channel to baseband or zero 1F. Simple analog low pass filtering (21) is applied before conversion in an ADC (22) to the digital domain. A digital signal processor (23) performs channel filtering and signal correction and supplies a signal to a digital demodulator (13). The processed digital signals are also supplied to a digital remodulator and DAC (24)

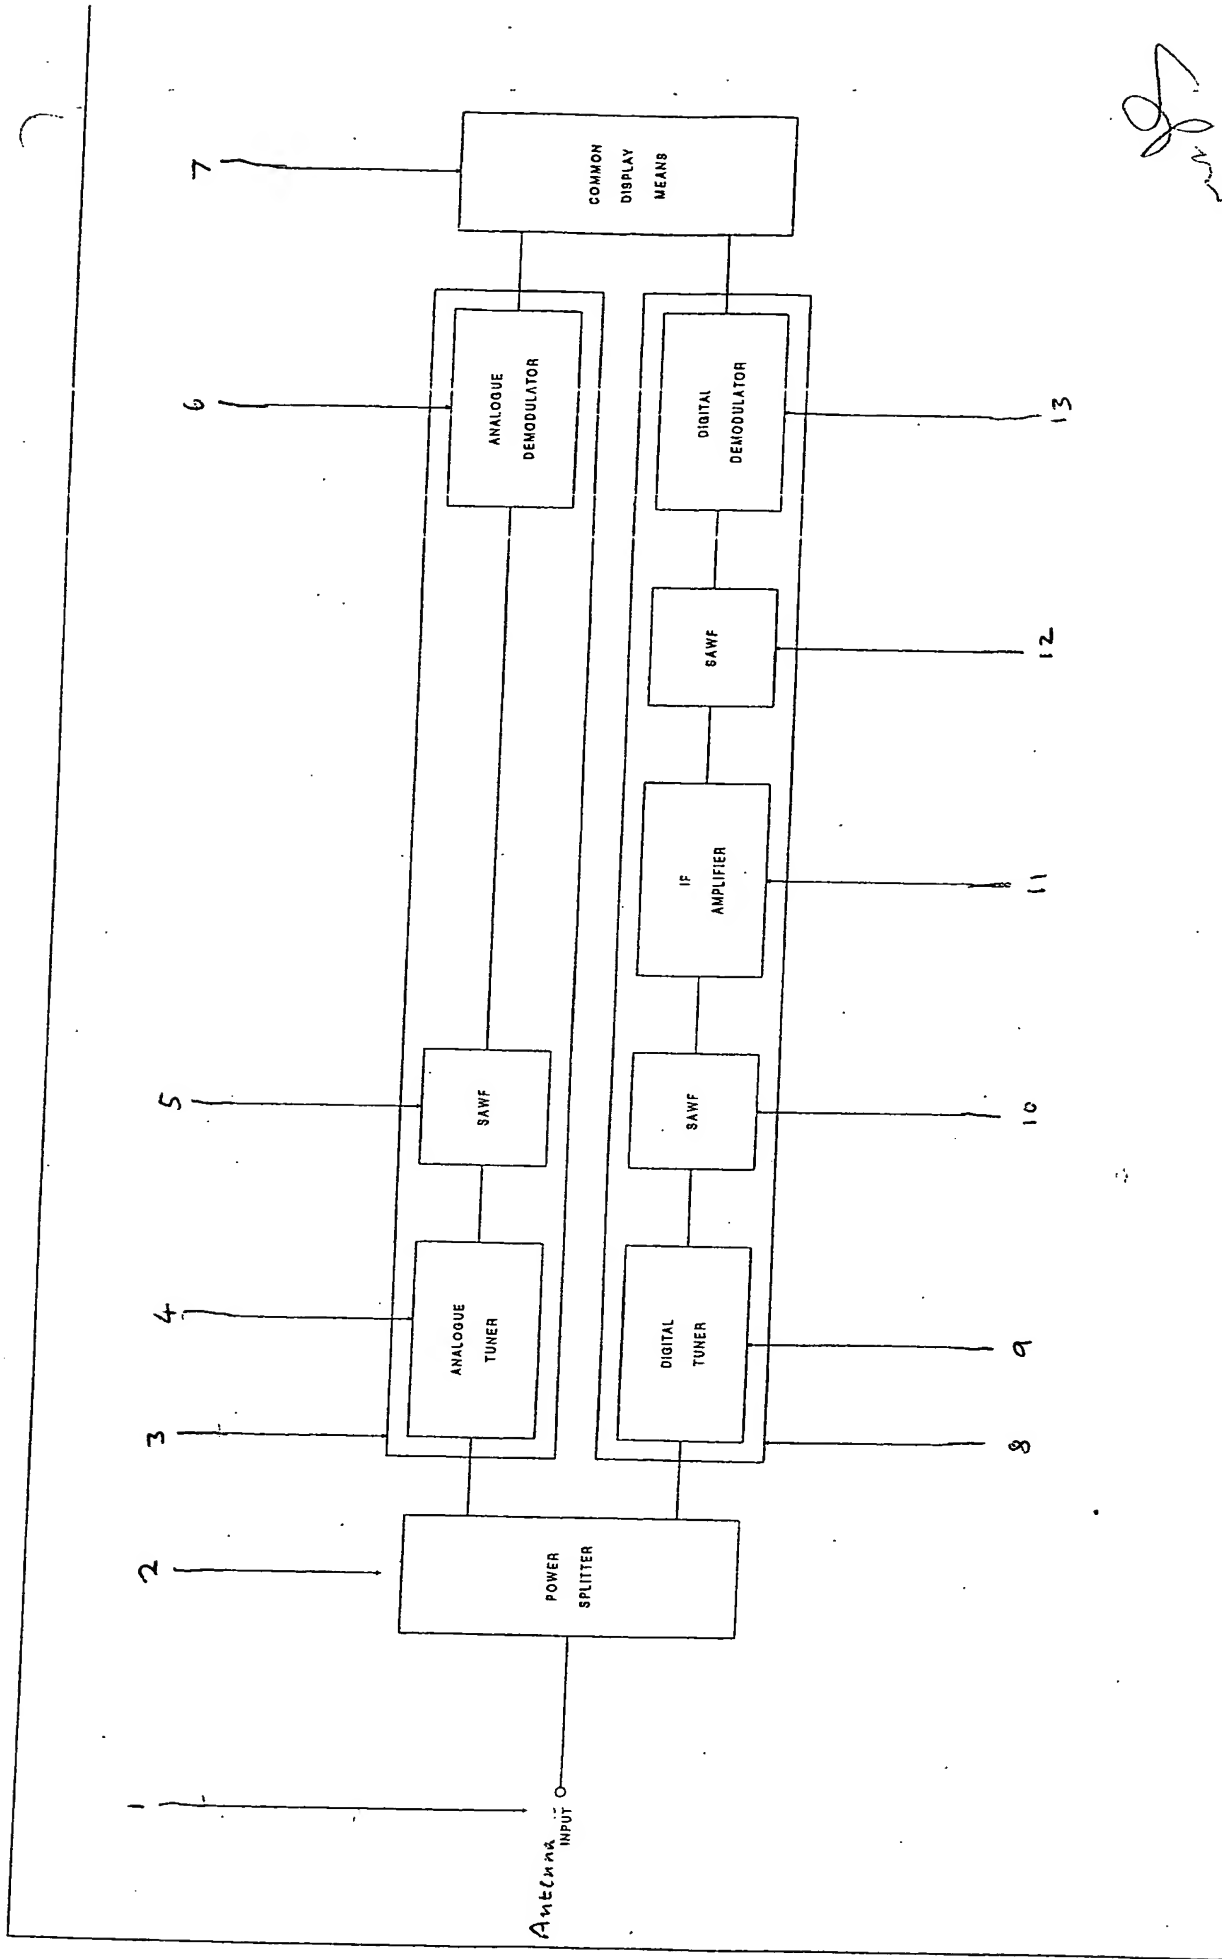


Figure 1

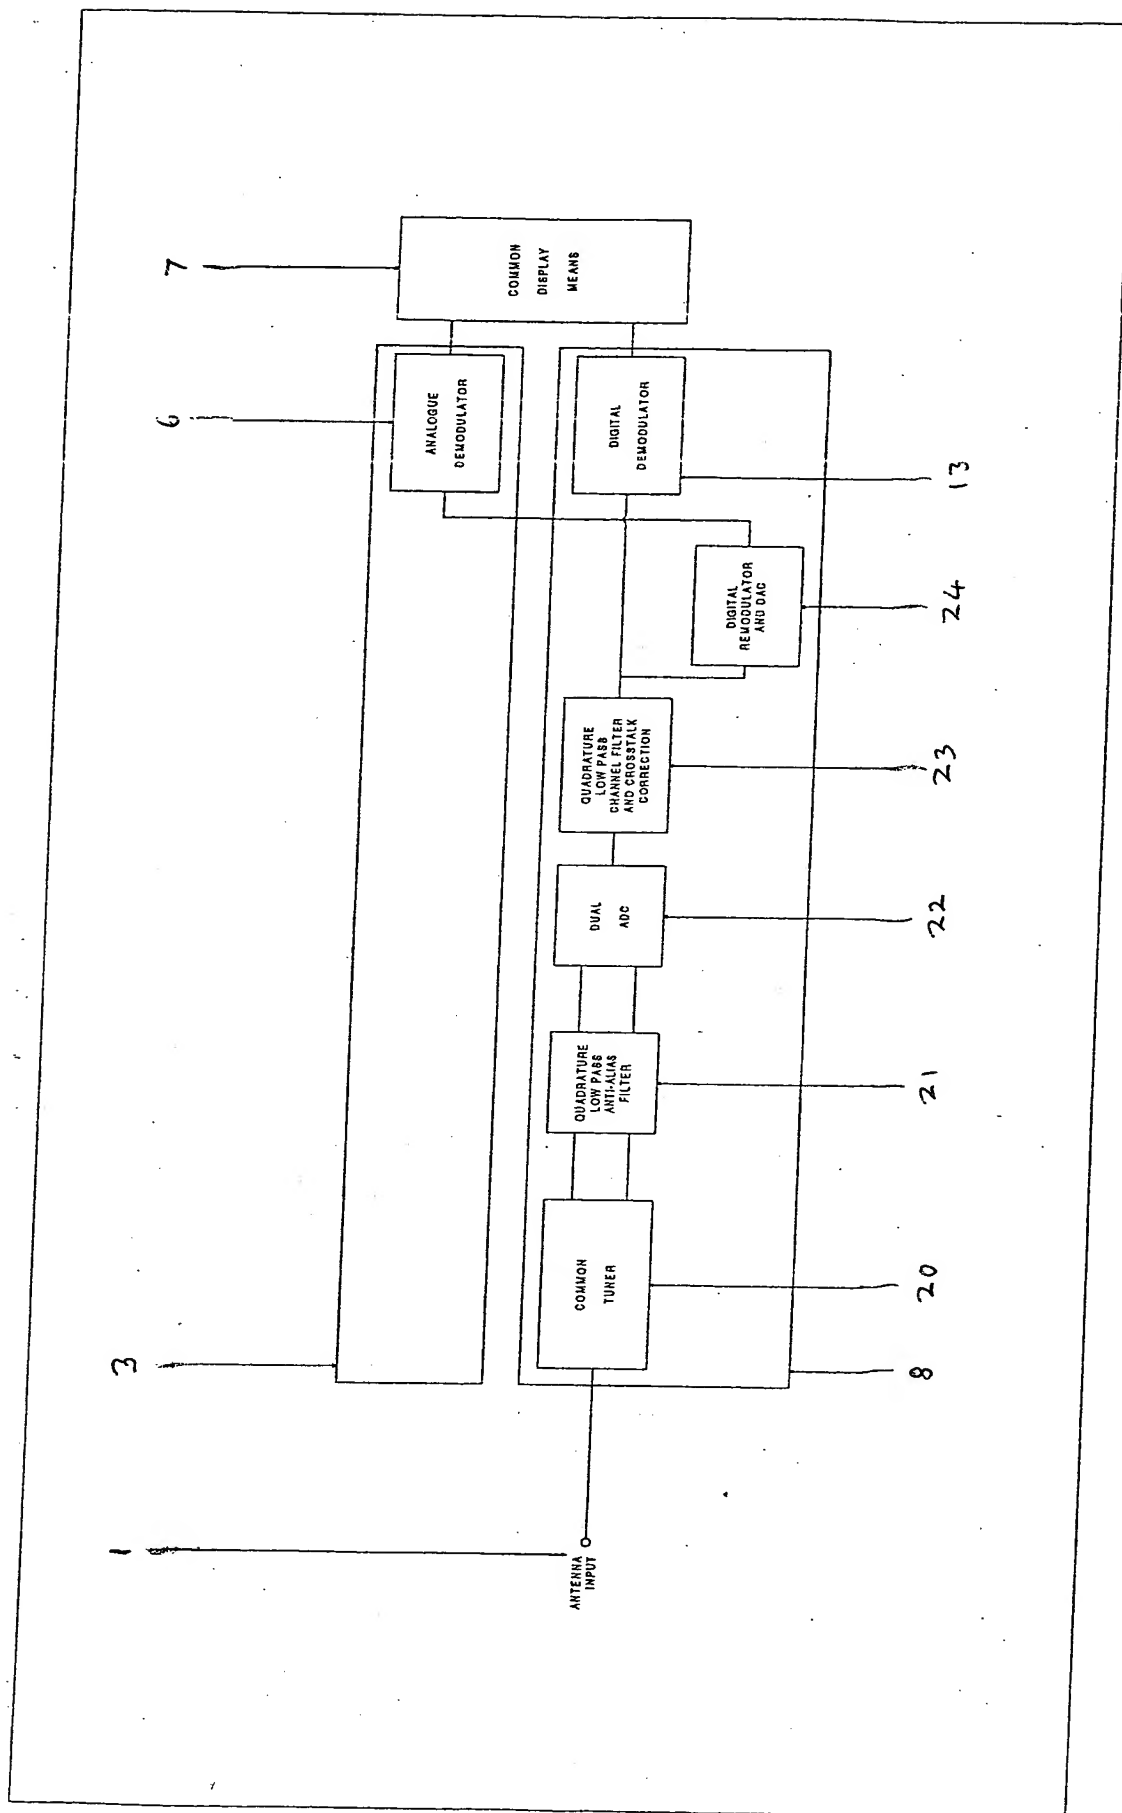


Figure 2